


OMRM 133 PRO



Otomatik Çift Kafa Alüminyum Profil Kesim Makinası Automatic Double Head Aluminium Profile Cutting Machine



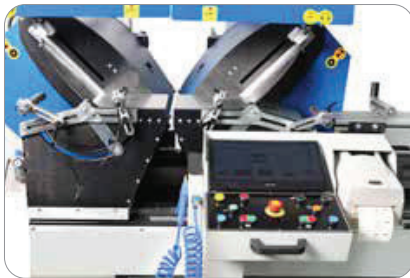


TR

- 15,6" dokunmatik ekranlı Windows tabanlı işletim sistemi
- CSV dosyası ile çalışma imkanı
- Manuel kesim modunda etiket yazdırabilme
- Kesim dosyaları (CSV) USB \ kablosuz ve kablolu ağ ile gönderilebilir
- İstenilen şekilde etiket ve barkod tasarlama
- Otomatik, manuel ve takoz kesim modu bulunmaktadır
- Uzaktan bağlantı ile sorun tespiti ve servis imkanı
- 2,2 kW motora sahip Ø600 mm çapında testereler
- Alüminyum profil kesimi için hidropnömatik ve soğutma sistemleri
- 22.5°-135° derece açılara servo sistemle otomatik olarak ayarlanabilir
- Tek kafa ve çift kafa çalıştırma imkanı
- Endüstri 4.0 uyumlu
- Servo kontrollü hareket sistemi hızlı pozisyonlama ve ölçü hassasiyeti sağlar
- Çoklu dil desteği
- Profil sarkmasını önleyen otomatik profil destekleme sistemi
- Hareketli ve sabit kafada profil taşıma konveyörleri
- Özel tasarlanmış talaş çıkışları

EN

- 15,6" touchscreen display with windows OS
- Possibility to work with CSV files generated by windows & doors design software
- Label printing feature in manual mode
- Cutting files can be transferred by USB, network or WIFI
- Designing feature of labels and barcodes
- Manual, automatic and slicing cutting modes
- Trouble shooting and service opportunity with remote connection
- Ø600 mm saw blades with 2,2 kW motors
- Hydropneumatic and cooling systems for aluminium cutting
- Automatic adjustment for 22.5°-135° angles by servo system
- Possibility to operate single head or double head
- Industry 4.0 compatible
- Servo-controlled motion system provides fast positioning and measurement accuracy
- Multi-language support
- Automatic profile support system that prevents profile sagging
- Profile transport conveyors on movable and fixed head
- Specially designed dust outputs

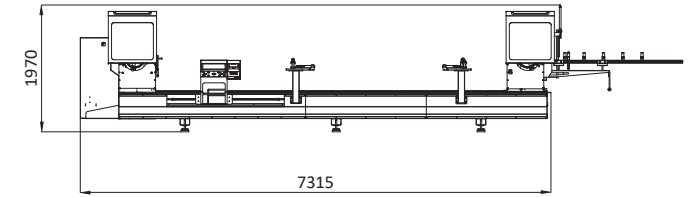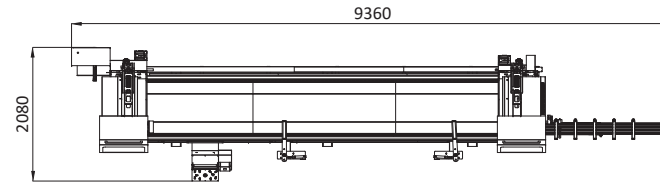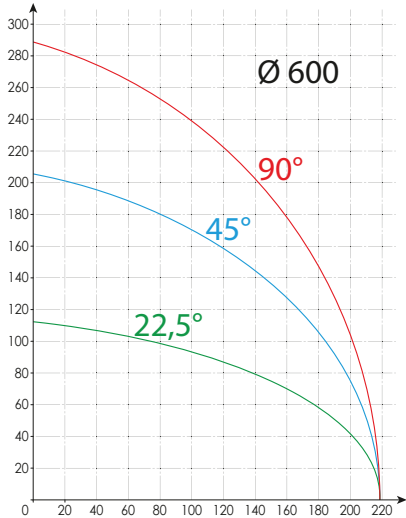

 Hz = 50 rpm = 2800 kW = 2.2	 V = 400 3P+E+N 50-60 Hz kW = 9	 Air 6-8 bar 100 lt/cycle-dk	 kg 2200 kg	 H = 1970 mm W = 9360 mm D = 2080 mm	 ØD = 600 mm Ød = 30 mm b = 4,4/3,8 mm z = 140	 L min = 405 mm L max = 11200 mm	 A = 22,5° B = 135°
---------------------------------------	---	---------------------------------------	-------------------	---	--	--	---------------------------